



OUTDOOR DIGITAL SIGNAGE

KIOSK PORTRAIT TYPE SCREEN

CLASS

MODEL

46"

H461SLI

KEY FEATURES

- Special DOOH LCD Panel
- All Weather Capable (IP66)
- Sunlight Readable Brightness with LED BLU modification
- Anti-Vandal Protection
- Non AC cooled system
- Auto Brightness Control
- Remote Control (RS232)
- Easy to Service with Front Door Open
- Capacitive Touch applied



Broadcast your branding with Hyundai Digital Signage!

HYUNDAI's Outdoor Digital Signage represents state-of-art display technology for any outdoor environment. Meeting the highest industrial standards they are provide a high degree of operational reliability and superior quality image, which are essential preconditions for attracting the attention of your target audience.



SPECIFICATIONS

Model	H461SLI	
Panel	Screen Size (diagonal)	46"
	Active Display Area (inch/mm)	40.09 x 22.54 / 1018.08 x 572.67
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	16.7 M
	Brightness (cd/m ² ; typ.)	2300
	Contrast Ratio	4000:1
	Response Time (ms; GTG)	8
	Viewing Angle	178°/178°
	Lifetime (hours)	50,000
	Backlight type	LED modified
	Transflective Panel	No
Touch Screen	Response Time (ms)	50 ~ 100
	Interface	USB 2.0
	Touch Intensity	Permanent (protected by glass)
	Detection Method	PCT
Input	VGA (15pin D-Sub)	1
	HDMI	1
	RS-232C	1
Power	Operating Voltage	100 ~ 120V AC, 220 ~ 240V AC
	Consumption (typ.)	450 W (Without PC : 25 °C)
	Consumption per nits (max.)	0.2 W
	Heater Block (with PC Case)	1.2 KW / Peak 2.5 KW
Features	Auto Cooling System	yes
	Auto Heating System	yes
	Anti-Vandal Glass (inch/mm)	1.45 / 11.5
	Anti Reflection Coating	yes
	Auto Brightness Sensor	yes
Operation	Temperature (°C)	-30 ~ 50
	Humidity (%)	20 ~ 80
	Storage (°C)	-40 ~ 60
	OSD Language	10 Lang
Approvals	Ingress Protection	IP66
Dimension	Set (W x H x D), inch/mm	33.66 x 78.74 x 5.9 / 855 x 2000 x 150
Weight	Set (lb/kg)	330.7 / 150
Mounting (Bottom mounting)	M10 wedge anchor (6 pcs)	
Computer	Option	

FEATURES

All Weather Capable

Equipped with an intelligent cooling and heating system, HYUNDAI's Outdoor Displays are well suited for withstanding any weather conditions from -30°C to +50°C.

Sunlight Readable Brightness


HYUNDAI provides special displays which are based on the Optical Bonding for installatons in environment with the birghtest lightning conditions. Make your messages and images clear and readable under even bright sunlight.

Anti-Vandal Protection

Thanks to a special tempered security glass. HYUNDAI's Outdoor Displays are protected against any vandalism attacks using Anti-Vandal glass bonding technique improving in durability from outside damage.

DIMENSIONS

H461SLI [unit: mm]

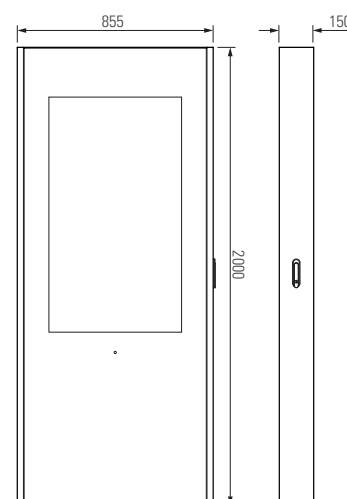

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE; SEP. 2012

HEAD OFFICE - HYUNDAI IBT CO., LTD.

106, Apogongdan-gil, Gimche on-si, Gyeongsangbuk-do,
740-862 The Republic of Korea
Tel. +82 54 430 6426 E-mail: prio123@hyundaiibt.com
www.hyundaiibt.com

HYUNDAI IT AMERICA CORP.

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaita.com
www.hyundait.com

HYUNDAI IT EUROPE GMBH

Siemensstrasse 22, 63225 Langen, Germany
Tel. +49(0) 6103-38878-100 email : info@hyundait.eu
www.hyundait.eu

HYUNDAI IT JAPAN

Sunbridge Ogawamachi Bldg 4F, 2-2 Ogawamachi Kanda
Chiyoda-Ku, Tokyo, Japan
Tel. +81 3 5259 7645 email : oysk@hyundait.com
www.hyundait.jp